



Clifford & Snell

# V4

## LED 'Flashing' & 'Status' Beacons Yodac

Tom Cribb Road, Thamesmead,  
London SE28 0BH  
Tel: +44 (0)20 8316 4477  
or (0)20 8317 1717  
Fax: +44 (0)20 8317 2400  
Email: sales@cliffordandsnell.com  
Web Site: www.cliffordandsnell.com


### MAIN FEATURES

- For use as a Safe Area flashing alarm
- 8 or 12 LED array allowing condition of 'status' or 'flashing' mode. See **CONFIGURATOR** for coding
- Continuously rated
- High light intensity
- Long life LED design
- Reliable and simple to install
- Red / White flame retardant ABS plastic enclosure
- Up to 4 modules in any combination of lens colour ranging from Red, Amber, Green, Opal, Blue, Clear
- Each beacon should be wired independently.



**NEW** 'Flashing' & 'Status' Beacons

### DIMENSIONS mm

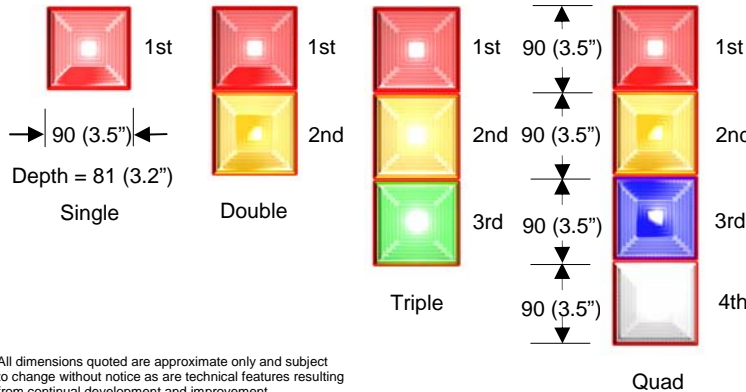

All dimensions quoted are approximate only and subject to change without notice as are technical features resulting from continual development and improvement.

### TECHNICAL SPECIFICATION

- Operating voltage 12Vdc/24Vdc
- Operating temp range -20 to +40deg C
- Storage temp range -40 to +70deg C
- Relative humidity 90% @ 40deg C
- IP65 rated
- Weight: - Single = 0.15 Kg Double = 0.3 Kg  
Triple = 0.45 Kg Quad = 0.6 Kg

### MOUNTING

All units are supplied separate from the back box for ease of installation. The back box should be mounted to a reasonably flat surface or bulkhead. A gasket is supplied, should the surface be uneven, or if the unit is to be used in wet conditions. The installation is completed by fitting the beacon onto the back box by means of the supplied screws.

### LINE MONITORING

Monitoring via reverse polarity  
End of line resistor: - minimum 3K3 ohms, 0.5 watts wire-wound or metal film type.

### CONFIGURATOR

